

HikCentral-Workstation/32

HikCentral-Workstation/32 is an integrated security software designed to meet versatile security challenges in one intuitive platform: from managing individual systems such as video security, access control, intrusion alarm, etc., to collaborating multiple systems under a unified architecture. While protecting people and property, it makes daily operations more efficient, and helps various kinds of users make smarter decisions.



Key Feature

Home Page

- Providing two predefined Home page modes on Web Client, including system installation and management mode, security control and management mode
- Supports customizing Home page mode on Web Client
- Supports customizing control panel on Control Client
- Supports switching Home page mode for visualization and non-visualization management
- Providing different report dashboards for resource status, access records, vacant parking spaces, alarms, etc., on the Home page of Web Client

Wizard

- Providing wizards for video management, access control, vehicle management, alarm detection, and time & attendance on Web Client

Live View and Playback

- Custom window division configurable
- Viewing maps and real-time events during live view and playback
- Stream type self-adaptive, transcoded playback, and frame- extracting playback
- Fisheye dewarping of multi-channel
- Controlling PTZ in visualization way
- Supports decoding stream from cameras with high-definition, such as PanoVu series camera

Visual Tracking

Recording and Storage

- Recording schedule for continuous recording, event recording and command recording
- Storing videos on encoding devices, Hybrid SANs, cloud storage servers
- Providing main storage and auxiliary storage
- Providing video copy-back
- Storing alarm pictures on NVRs, Hybrid SANs, cloud storage servers, HikCentral server
- Supports search of VCA event related videos, video footages, and event triggered video footages.

Event and Alarm Management

- Camera linkage, alarm pop-up window and multiple linkage actions
- Multiple events for video security, access control, resource group, resource maintenance, etc.
- Supports adding combined alarms in a visualization way

Person Management

- Getting person information from added devices
- Provides multiple types of credentials, including card number, face, and fingerprint, for composite authentications

Access Control and Video Intercom

- Setting schedules for free access status and access forbidden status of doors
- Supports multiple access modes for both card reader authentication and person authentication
- Supports assigning an access level to persons, assigning access levels to persons, assigning access levels to person groups, and assigning access levels to an access group
- Supports advanced functions such as multi-factor authentication, anti-passback, and multi-door interlocking
- Controlling door status in real-time
- Calling indoor station by the Control Client
- Calling the platform by door station and indoor station, and answering the call by the Control Client
- Supports setting card templates and printing cards
- Supports storing access data of devices supporting ISUP to the local storage

Security Control

- Real-time alarm management for added security control panels
- Adding zone as hot spot on E-map and viewing the video of the linked camera
- Event and alarm linkage with added cameras, including pop-up live view, captured picture
- Subscribing the events that the Control Client can display in real-time
- Acknowledging the received alarm on the Control Client

Vehicle and Parking Management

- Managing parking lots, entrances and exits, and lanes.
- Supports linking guidance screens with parking lot for information display
- Setting entry & exit rules for registered vehicles as well as temporary vehicles
- Entrance and exit control based on license plate recognition, card, or video intercom
- Viewing real-time and history vehicle information and controlling barrier gate manually on the Control Client

Temperature Screening

- Displaying the skin-temperature and whether wearing a mask or not about the recognized persons in real time
- Triggering events and alarms when detects abnormal temperature and no mask worn
- Viewing reports about skin-surface temperature and mask-wearing

Face and Body Recognition

- Displaying the information of the recognized persons in real-time
- Searching history records of recognized persons, including searching in captured pictures, searching matched persons, searching by features of persons, and searching frequently or rarely appeared persons
- Supports generating movement patterns for matched persons and playing patterns on the map
- Supports setting multiple rules for dumping access records

Third-Party Integration

- Sending the original attendance data to a third-party database (Microsoft® SQL Server, MySQL, PostgreSQL, or Oracle), thus the client can access third-party T&A and payment system
- Supports dumping access records as the CVS or TXT files to the local storage
- Supports setting table name, table fields, and mode for the third-party database

Network Management

- Managing network transmission devices such as switches, displaying the network connection and hierarchical relationship of the managed resources by a topology
- Viewing the network details between the device nodes in the topology, such as downstream and upstream rate, port information, etc. and checking the connection path
- Exporting the topology and abnormal data to check the device connection status and health status

Software Specification

Features		Maximum Performance
Devices and Resources	Cameras <i>*Including ANPR Cameras and Cameras with Face Capture Function</i>	32
	Managed Device IP Addresses <i>*Including Encoding Devices, Access Control Devices, Security Control Devices, and Remote Sites</i>	128
	Video Intercom Devices <i>*Including Indoor Station</i>	8
	Alarm Inputs (Including Zones of Security Control Devices)	32
	Alarm Outputs	32
	Alarm Inputs of Security Control Devices	32
	ANPR Cameras	4
	Cameras with Face Capture Function	2
	Security Radars	2
	Areas	64
	Cameras per Area	32
	Alarm Inputs per Area	16
	Alarm Outputs per Area	16
Recording	Recording Schedule	64
	Recording Schedule Template	32
Event & Alarm	Event and Alarm Rules	128
	Storage of Events or Alarms without Pictures	5/s
	Events or Alarms Sent to Clients <i>*The clients include Control Clients and Mobile Clients.</i>	5/s 8 Clients/s
	Notification Schedule Templates	100
Picture	Picture Storage <i>*Including event/alarm pictures, face pictures, and vehicle pictures.</i>	5/s
Reports	Regular Report Rules	64
	Event or Alarm Rules in One Event/Alarm Report Rule	32
	Records in One Sent Report	10,000 or 10 MB
	Resources Selected in One Report <i>*With this limitation, you can generate a neat and clear report via the Control Client and it costs less time.</i>	20
Data Storage	Data Retention Period	Stored for 6 Months
Users and Roles	Concurrent Accesses via Web Clients and Control Clients	8
	Concurrent Accesses via Mobile Clients	8
	Users	8
	Roles	8
Vehicle (ANPR)	Vehicle Lists	50
	Vehicles per Vehicle List	500
Entrance & Exit	Lanes	4
	Cards Linked with Vehicles	2,500
	Vehicle Passing Frequency in Each Lane	1 Vehicle/s
Face Comparison	Persons with Profiles for Face Comparison	10,000
	Face Comparison Groups	16
	Persons in One Face Comparison Group	1,000
Access Control	Persons with Credentials for Access Control	3,000
	Total Credentials (Card + Fingerprint)	15,000
	Cards	15,000
	Fingerprints	12,000
	Profile Pictures	3,000

	Access Points (Doors+Outdoor Station)	8
	Access Levels	16
	Access Schedules	32

Decoding Performance of Control Client

Resolution	Video Encoding Type	Recommended Bite Rate and Frame Rate	Maximum Hardware Decoding Channels	Maximum Software Decoding Channels
4CIF (704*576)	H.264	1024 kbps * 30 fps	36	31
	H.265	512 kbps * 30 fps	30	30
720P (1280*720)	H.264	2048 kbps * 30 fps	12	10
	H.265	1024 kbps * 30 fps	12	8
1080P (1920 × 1080)	H.264	4096 kbps * 30 fps	6	5
	H.265	2048 kbps * 30 fps	6	4
4M (2560 × 1440)	H.264	8192 kbps * 30 fps	3	2
	H.265	4096 kbps * 30 fps	3	2
8M (3840 × 2160)	H.264	16384 kbps * 30 fps	1	1
	H.265	8192 kbps * 30 fps	1	1
6M (2560 × 2560) (Fisheye Camera)	H.264	12288 kbps * 30 fps	2	2
	H.265	6144 kbps * 30 fps	2	2
12M (4000 × 4000) (Fisheye Camera)	H.264	16384 kbps * 20 fps	1	1
	H.265	8192 kbps * 20 fps	2	1


Hardware Specification



Processor	Intel® Core™ i3-8100 (4Cores/6MB/4T/ 3.6GHz/65W);
Operating Systems	Microsoft® Windows 10 IoT Ent (64-bit)
Memory	2 × 4GB 2666MHz DDR4 UDIMM
Graphics Card	Integrated Intel® HD Graphics 630
Storage	M.2 256GB SATA Class 20 solid state drive
NIC	Integrated Intel I219-LM Ethernet LAN 10/100/1000
I/O Ports	10 External USB: 1 × USB Type-C 3.1 Gen 2, 5 × 3.1 Gen 1 Type-A (1 Front, 4 Rear), 4 × USB 2.0, 1 × RJ-45, 2 × Displayport, 1 × Serial, 2 × PS/2
Form Factor	Small Form Factor
Power Supply	300W typical 90% Efficient PSU (80 PLUS Bronze)
Dimensions (H × W × D)	29cm × 9.26cm × 29.2cm (11.42" × 3.7" × 11.5")
Weight	7.57lbs / 5.26kg
Certification	CE, FCC, UL
Warranty	36 Months


Front View

- 1- Power Button and Power Light
- 2- Hard Drive Activity Light
- 3- Headset/Universal Audio Jack Port
- 4- USB 2.0 Port with PowerShare
- 5- USB 2.0 Port
- 6- USB 3.1 Gen 2 Port with PowerShare
- 7- USB 3.1 Gen 1 Port

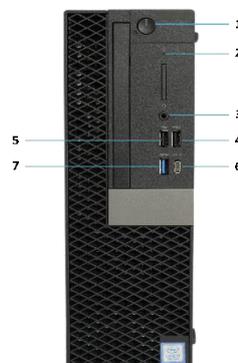

Back View

- 1- Line-Out Port
- 2- PS/2 Keyboard Port
- 3- Serial Port
- 4- PS/2 Mouse Port
- 5- Display Ports
- 6- USB 3.1 Gen 1 Ports
- 7- USB 2.0 Ports (Supports SmartPower On)
- 8- Power Connector Port
- 9- Power Supply Diagnostic Light
- 10- Release Latch
- 11- Service Tag Label
- 12- Network Port
- 13- HDMI Port

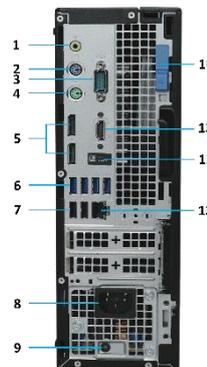


Note: By default, the DP to VGA adapter will be provided.

System Requirement

* For high stability and good performance, the following system requirements must be met.

Feature	Description
OS for Control Client	Microsoft® Windows 10 (64-bit) Microsoft® Windows 8.1 (32/64-bit) Microsoft® Windows 7 SP1 (32/64-bit) Microsoft® Windows Server 2019 (64-bit) Microsoft® Windows Server 2016 (64-bit) Microsoft® Windows Server 2012 (64-bit) Microsoft® Windows Server 2012 R2 (64-bit) Microsoft® Windows Server 2008 R2 SP1 (64-bit) <i>*For Windows 8.1 and Windows Server 2012 R2, make sure it is installed with the rollup (KB2919355) updated in April, 2014.</i>
Browser Version	Chrome 84 and above Firefox 84 and above Safari 11 and above (running on Mac OS X 10.3/10.4) Internet Explorer 11 and above
Database	PostgreSQL V9.6.13
OS for Smartphone	iOS 10.0 and later Android phone OS version 5.0 or later, and dual-core CPU with 1.5 GHz or above, and at least 2G RAM
OS for Tablet	iOS 10.0 and later Android tablet with Android OS version 5.0 and later

Typical Application

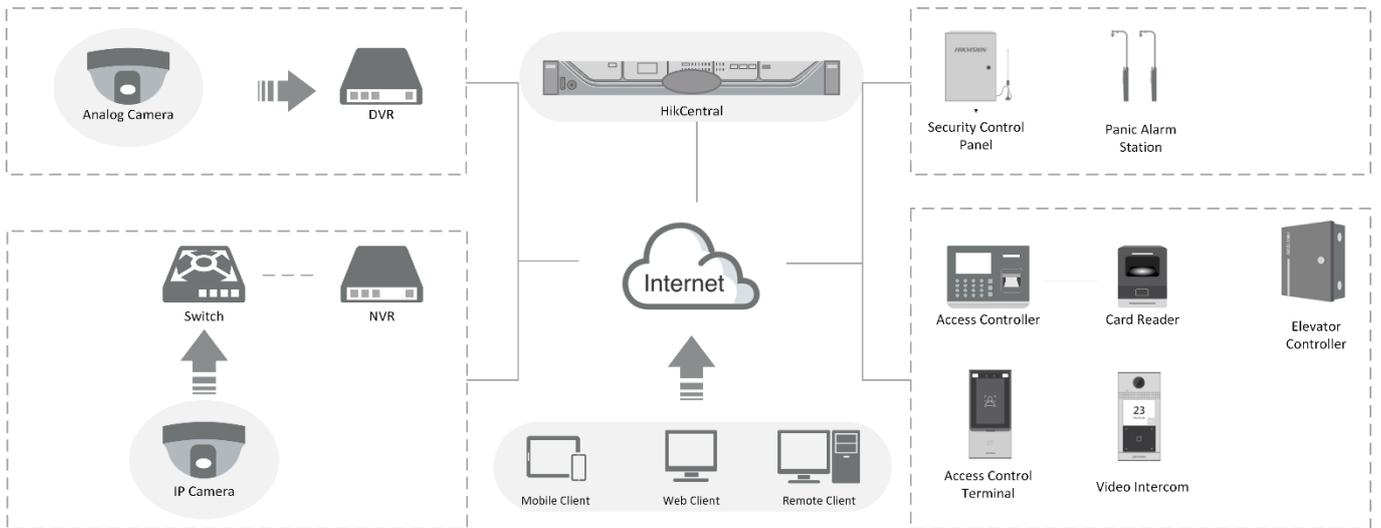

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

